

clear ahead

Speed · Innovation · Performance


DC-LINE

DC-LINE


DC-Line

DIMENSION-POLYANT DC Cruising Laminates were specially developed for cruising yachtsmen who, above all, demand durable, stretch-resistant and easy to handle sails. The DC laminate structure is technically perfect: First, a scrim is encapsulated in two layers of film for high tear strength and excellent warp stability. The two-layer film increases stretch resistance and optimizes adhesive bonding. The woven taffeta is then laminated onto both sides to achieve a smooth surface and greater abrasion resistance. An additional coating with DIMENSION-POLYANT's special UVM-Finish improves UV stability and reduces the risk of mildew growth. The unique fabric construction of the DC line integrates all characteristics required for cruising sails: excellent shape retention, durability, high stretch resistance and easy handling. The DC line is available in various weights and are ideal for the majority of headsails and mainsails in the cruising arena.



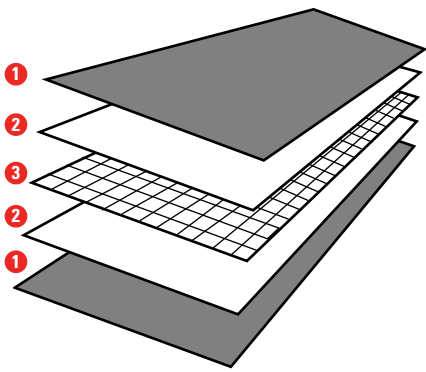

1. Woven taffeta coated with UVM finish protects against abrasion, provides UV stability and minimizes mildew growth.
2. Two-layer film for optimized adhesive bonding and low stretch
3. Strong warp/fill construction for high tear strength and warp stability

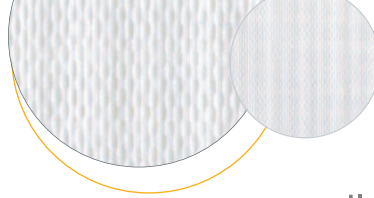

sailcloth
technology

DIMENSION-POLYANT GmbH, Germany

Headquarters

Speefeld 7

D-47906 Kempen

Phone: +49 (2152) 891 0

Fax: +49 (2152) 891 149

info@dimension-polyant.com

DIMENSION-POLYANT SAS, France

1, Rue Newton

Parc Technologique

F-17000 La Rochelle

Phone: +33 (0) 546 282 201

Fax: +33 (0) 546 412 840

larochelle@dimension-polyant.com

DIMENSION-POLYANT SAS, France

Port de la Pointe Rouge

F-13008 Marseille

Phone: +33 (0) 491 736 628

Fax: +33 (0) 491 722 505

marseille@dimension-polyant.com

DIMENSION-POLYANT UK Ltd., United Kingdom

Unit 11, Kingdom Close

Kingdom Business Park

Segensworth East

GB-Fareham Hampshire PO15 5TJ

Phone: +44 (1489) 570 551

Fax: +44 (1489) 570 451

uk@dimension-polyant.com

DIMENSION-POLYANT Inc., USA

78, Highland Drive

USA-Putnam CT 06260

Phone: +1 (860) 928 8300

Fax: +1 (860) 928 8330

info@us.dimension-polyant.com

DIMENSION-POLYANT Sailcloth PTY Ltd., Australia

P.O. Box 825

Unit 7/9 Powells Rd.

AUS-Brookvale N.S.W. 2100

Phone: +61 (2) 9905 9565

Fax: +61 (2) 9905 9569

dp-aus@dimension-polyant.com

DIMENSION-POLYANT.COM



**green technology
for sailing**

Optimum durability and stretch resistance for high performance cruising sails

HIGHEST QUALITY, HIGHEST TENACITY YARNS & FIBERS

The fibers in DIMENSION-POLYANT woven fabrics are engineered from high-quality, high-tenacity yarns

CONSISTENT CHEMICAL MAKEUP IN FINISHING

Continual research and development with the world's best raw materials results in optimized coatings and finishes

CONSISTENT SPECS

Start-to-finish control over the weaving and finishing processes means consistent stretch and firmness specs

FLATNESS

Wide-width looms designed specifically for sailcloth and climate-controlled weaving plant results in flat, straight fabrics

IN-HOUSE CONTROL OF DESIGN, WEAVING & FINISHING

Total control of every step in the sailcloth manufacturing process gives DP wovens consistent top performance

WORLD'S LARGEST MAKER OF WOVEN POLYESTER

DIMENSION-POLYANT has more worldwide woven polyester fabric design, testing, construction, and finishing facilities than any other sailcloth producer

- ▶ improved elongation resistance
- ▶ excellent diagonal stability
- ▶ highly resistant surfaces
- ▶ UV stabilisation
- ▶ mildew protection

Application DC

Boat Length	Mainsail front / back	Genoa front / back	Jib front / back
21° - 26°	DC44 / DC55	DC44 / DC44	DC55 / 55
27° - 32°	DC55 / DC66	DC44 / DC55	DC66 / DC66
33° - 38°	DC66 / DC77	DC55 / DC66	DC77 / DC77
39° - 44°	DC77 / DC99	DC66 / DC77	DC99 / DC99

Application (DC) DCP

Boat Length	Mainsail front / back	Genoa front / back	Jib front / back
27° - 32°	DC55 / DCP55	DC44 / DCP55	DCP55 / DCP55
33° - 38°	DCP55 / DCP66	DC55 / DCP55	DCP66 / DCP66
39° - 44°	DCP66 / DCP77	DC66 / DCP66	DCP77 / DCP77
45° - 52°	DCP77 / DCP99	DCP66 / DCP77	DCP99 / DCP99