

clear ahead

Speed · Innovation · Performance

PEN RACE




© Jacques Vapillon

FLEX[®] PEN RACE



DIMENSION-POLYANT's FLEX[®] line stands for "Fill Laminate Extra X". The FLEX[®] range of fabrics is suited to racing and cruising sails. Foundations of all FLEX[®] laminate constructions are strong fill and warp yarns. Additional 20° and 30° "Double X" patterns from the fill absorb multiple load situations. Thanks to its novel construction, FLEX[®] handles strain in six different directions, resulting in unprecedented shape retention characteristics. In addition to primary loads, off-angle loads in clew, head and tack areas, mid leech and luff are catered for. FLEX[®] will also absorb those dynamic loads that occur during sailing and enables excellent shape control. FLEX[®] styles are crosscut fabrics and available with several fibre densities which can be combined in a sail in accordance with the expected load situation. FLEX[®]'s firmly locked-up fiber matrix guarantees long performance life and superior durability.



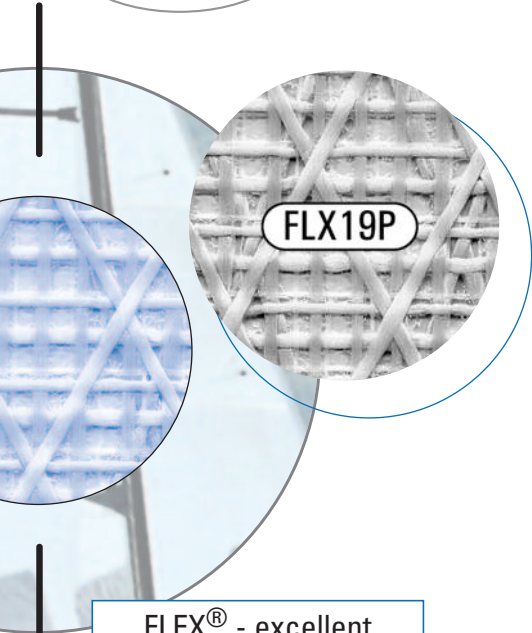

FLEX® - excellent shape control

- Multi-directional load handling – 0° Warp/90° Fill, double 20° yarns, and double 30° yarns means FLEX® handles load in six directions
- Leech stability – FLEX®'s double "X"s handle mid-leech loads of high- and low-aspect mains and genoas
- Step-up construction – Progressive weights in each FLEX® line allow step-up construction
- Tear strength – Strong, durable fill and warp yarns make FLEX® a tough, durable material
- Maximum draft position – Multi-directional yarn layout addresses stability in draft position
- Ease of construction – FLEX®'s two extra "X"'s means there's no need to flip-flop panels – and a FLEX® sail has fewer panels than other cross-cut products
- Sail weight reduction – FLEX® has the ability to split weights from high-load to low-load areas

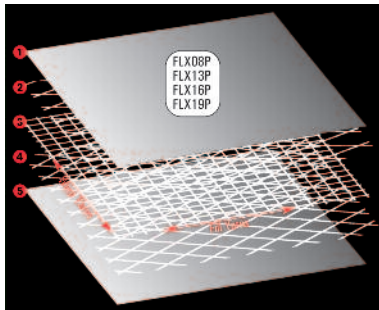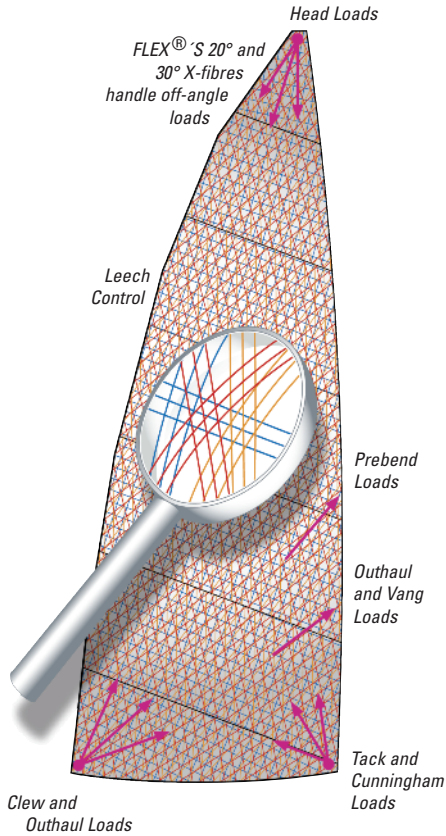

1. PET film with SPF+ UV inhibitor for low load stability and UV protection
2. 20° Yarns handle off-angle high loads: upper leech, head, tack, and clew
3. 30° Yarns handle off-angle low loads: mid-leech, prebend, boom vang
4. Fill/Warp Yarns handle primary loads, add breaking strength and durability
5. PET film with SPF+ UV inhibitor for low load stability and UV protection

Name	Warp/Fill	X-PLY 30 degree	X-PLY 20 degree
FLX 08 P	4 x 4 1,000 P x 1,000 PEN	3 x 3 1,300 PEN	
FLX 13 P	4 x 4 1,000 P x 1,000 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN
FLX 16 P	5 x 6 1,000 P x 1,000 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN
FLX 19 P	5 x 7 1,000 P x 1,300 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN
FLX 24 P	6 x 6 1,000 P x 2,000 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN

3 x 3 1,300 is 3,900 DPI to each side or 7,800 DPI
 2 x 2 1,300 is 2,600 DPI to each side or 5,200 DPI



sailcloth technology

DIMENSION-POLYANT GmbH, Germany Headquarters

Speefeld 7
 D-47906 Kempen
 Phone: +49 (2152) 891 0
 Fax: +49 (2152) 891 149
 info@dimension-polyant.com

DIMENSION-POLYANT SAS, France

1, Rue Newton
 Parc Technologique
 F-17000 La Rochelle
 Phone: +33 (0) 546 282 201
 Fax: +33 (0) 546 412 840
 larochelle@dimension-polyant.com

DIMENSION-POLYANT SAS, France

Port de la Pointe Rouge
 F-13008 Marseille
 Phone: +33 (0) 491 736 628
 Fax: +33 (0) 491 722 505
 marseille@dimension-polyant.com

DIMENSION-POLYANT UK Ltd., United Kingdom

Unit 11, Kingdom Close
 Kingdom Business Park
 Segensworth East
 GB-Fareham Hampshire PO15 5TJ
 Phone: +44 (1489) 570 551
 Fax: +44 (1489) 570 451
 uk@dimension-polyant.com

DIMENSION-POLYANT Inc., USA

78, Highland Drive
 USA-Putnam CT 06260
 Phone: +1 (860) 928 8300
 Fax: +1 (860) 928 8330
 info@us.dimension-polyant.com

DIMENSION-POLYANT Sailcloth PTY Ltd., Australia

P.O. Box 825
 Unit 7/9 Powells Rd.
 AUS-Brookvale N.S.W. 2100
 Phone: +61 (2) 9905 9565
 Fax: +61 (2) 9905 9569
 dp-aus@dimension-polyant.com

DIMENSION-POLYANT.COM



green technology for sailing